

SUN Q

LED 350mA - 3,5W


IT Faretto da incasso - Realizzato in metallo con schermo in policarbonato.

EN Recessed spotlight - Metal structure and screen in polycarbonate.

DE Einbaustrahler - Metall-Gehäuse und Polykarbonat- Abdeckung.


118-140 lm/W PHOTOLOGICAL CLASS 0 CRI=85

CE ENEC     IP20 PATENTED

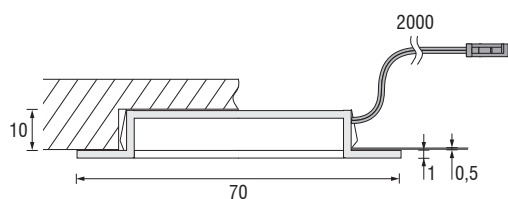


(A) Installazione su legno
Fitting - Wooden Surfaces
Montage - Holz

(B) Installazione su lamiera
Fitting - Metal Surfaces
Montage - Metall

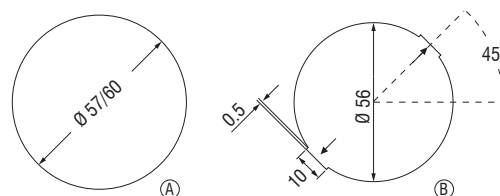

Foro di incasso / Recessed hole / Einbaumaße

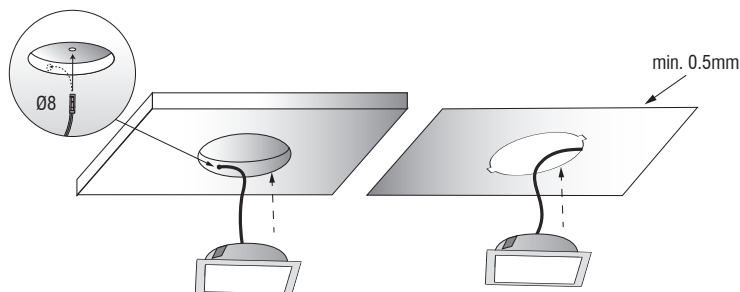

Finitura Finish - Ausführung	3000 K		4000 K		Imballo - Packaging - Verpackung		
	Codice - Part no. - Artikel-Nr.	EEC	Codice - Part no. - Artikel-Nr.	EEC	Pcs	Kg	mm
Acciaio / Steel / Edelstahl	1732020A	A++	1732120A	A++	1	0,085	25 x 75 x 100
Alluminio / Aluminium / Aluminium	1732020S	A++	1732120S	A++	1	0,085	25 x 75 x 100
Cromo / Chrome / Chrom	1732020C	A++	1732120C	A++	1	0,085	25 x 75 x 100
Bronzo / Bronze / Bronze	1732020L	A++	1732120L	A++	1	0,085	25 x 75 x 100
Oro / Gold / Gold	1732020O	A++	1732120O	A++	1	0,085	25 x 75 x 100
Bianco / White / Weiß	1732020B	A++	1732120B	A++	1	0,085	25 x 75 x 100
Nero / Black / Schwarz	1732020N	A++	1732120N	A++	1	0,085	25 x 75 x 100

SUN Q LED 350mA - 3,5W		LUX
		3000K 4000K
mm	108°	
250	Ø 1000	1400 1600
500	Ø 2000	300 400
750	Ø 3100	150 120
1000	Ø 4100	70 100

Dimensioni in millimetri (mm) / Dimensions in Millimeters (mm) / Dimensionen in Millimetern (mm)
Alimentatore non incluso / Driver not included / LED-Konverter nicht inbegriffen

Connettore
Connector / Verbindungsstecker



SUN Q KIT 3

LED 350mA - 3 x 3,5W

IT KIT Faretto da incasso - 3 faretti SUN Q, 1 driver con cavo e spina, 1 distributore a 4-uscite.


EN KIT Recessed spotlight - 3 SUN Q spotlights, 1 driver with cable and plug, 1 4-way distribution box.

DE SET Einbaustrahler - 3 SUN Q-Strahler, 1 Konverter mit Kabel und Stecker, 1 4-fach Verteiler.




118-140 lm/W PHOTOLOGICAL CLASS 0 CRI=85

CE ENEC 05 IP20 PATENTED

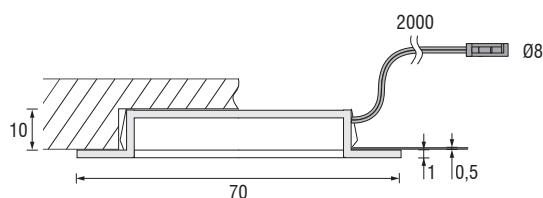


(A) Installazione su legno
Fitting - Wooden Surfaces
Montage - Holz

(B) Installazione su lamiera
Fitting - Metal Surfaces
Montage - Metall

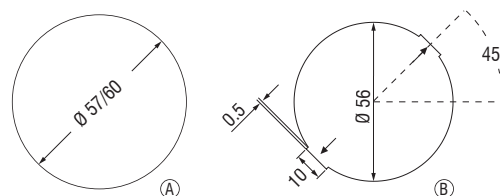

Foro di incasso / Recessed hole / Einbaumaße



Driver 350mA incluso
350mA Driver included
350mA-LED-Konverter inbegriffen

Finitura Finish - Ausführung	3000 K		4000 K		Imballo - Packaging - Verpackung		
	Codice - Part no. - Artikel-Nr.	EEC	Codice - Part no. - Artikel-Nr.	EEC	Pcs	Kg	mm
Acciaio / Steel / Edelstahl	173K410A	A++	173K510A	A++	1	0,450	105 x 190 x 120
Alluminio / Aluminium / Aluminium	173K410S	A++	173K510S	A++	1	0,450	105 x 190 x 120
Cromo / Chrome / Chrom	173K410C	A++	173K510C	A++	1	0,450	105 x 190 x 120
Bronzo / Bronze / Bronze	173K410L	A++	173K510L	A++	1	0,450	105 x 190 x 120
Oro / Gold / Gold	173K410O	A++	173K510O	A++	1	0,450	105 x 190 x 120
Bianco / White / Weiß	173K410B	A++	173K510B	A++	1	0,450	105 x 190 x 120
Nero / Black / Schwarz	173K410N	A++	173K510N	A++	1	0,450	105 x 190 x 120

SUN Q LED 350mA - 3,5W		LUX
		3000K
		4000K
mm	108°	
250	Ø 1000	1400
		1600
500	Ø 2000	300
		400
750	Ø 3100	150
		120
1000	Ø 4100	70
		100

Dimensioni in millimetri (mm) / Dimensions in Millimeters (mm) / Dimensionen in Millimetern (mm)
Alimentatore incluso / Driver included / LED-Konverter inbegriffen

Connettore
Connector / Verbindungsstecker








Distanziali SUN

IT Distanziali per la libera installazione - Struttura in policarbonato verniciato; compatibili con i faretti SUN e SUN Q.

EN Spacers for surface mounting - Coated polycarbonate structure; for SUN and SUN Q spotlights.

DE Anbauringe - Beschichteter Ring aus Polykarbonat; fuer Strahler SUN und SUN Q.

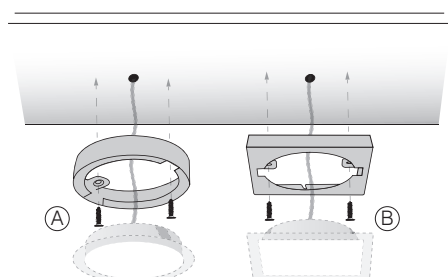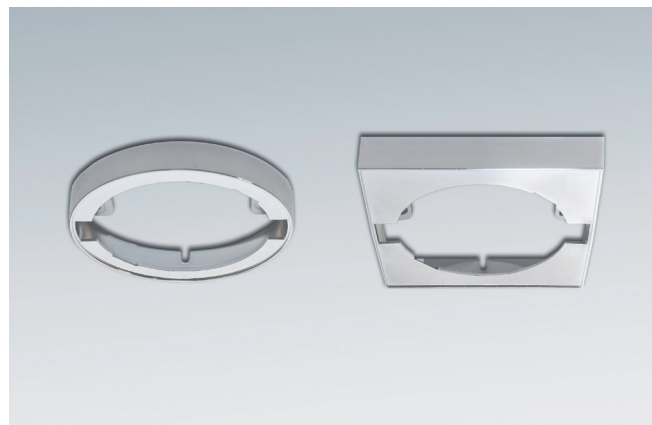

Finitura Finish - Ausführung	Codice - Part no. - Artikel-Nr.		Imballo - Packaging - Verpackung			
	SUN A	SUN Q B	Pcs	Kg A	Kg B	mm
Acciaio / Steel / Edelstahl	6730022A	6732022A	1	0,008	0,011	12 x 75 x 75
Alluminio / Aluminium / Aluminium	6730022S	6732022S	1	0,008	0,011	12 x 75 x 75
Cromo / Chrome / Chrom	6730022C	6732022C	1	0,008	0,011	12 x 75 x 75
Bronzo / Bronze / Bronze	6730022L	6732022L	1	0,008	0,011	12 x 75 x 75
Oro / Gold / Gold	6730022O	6732022O	1	0,008	0,011	12 x 75 x 75
Bianco / White / Weiß	6730022B	6732022B	1	0,008	0,011	12 x 75 x 75
Nero / Black / Schwarz	6730022N	6732022N	1	0,008	0,011	12 x 75 x 75

Dimensioni in millimetri (mm)

Dimensions in Millimeters (mm) / Dimensionen in Millimetern (mm)

Prolunghe e Box di connessione

Extensions and connection boxes / Verlängerungen und Anschlussboxen





LED 350mA

350mA - Cavo per connessione singola / Single connection cable / Einzelverbindungskabel

COD.

6LC10005

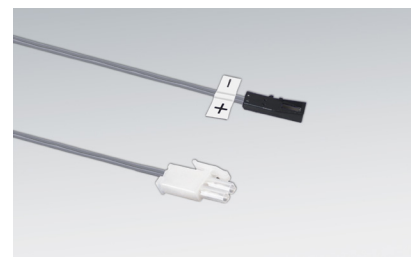

350mA - Prolunga / Extension / Verlängerungskabel



COD.

L = 1000

L = 2000

6LC10001


6LC10002

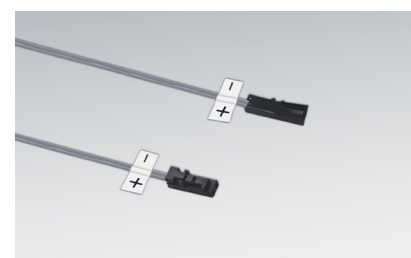

350mA - Distributore a 4 uscite / 4-way distribution box / 4-fach Verteiler

COD.


1T3000

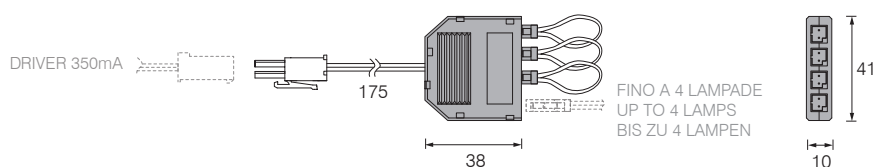

350mA - Catenaria per collegamenti in serie / Series twin socket plug / Serien-Verteiler

COD.

6LC10013

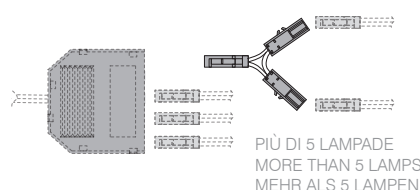

Drivers per LED



LED Drivers / LED-Konverter



350mA - 15W

CE ENEC 05 cULus EMC M M F SELV


V IN	Hz	mA	W	L x P x H (mm)	A PLUG	B JST
220V	50...60Hz	350mA	1-15W	116 x 34 x 19	151Z10	151Z11
cULus 110V	60Hz	350mA	1-10W	116 x 34 x 19	151Z10110	-

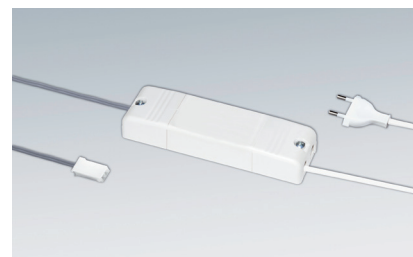

350mA - 15W

CE ENEC 05 EMC M M F SELV



V IN	Hz	mA	W	L x P x H (mm)	COD.
220V	50...60Hz	350mA	1-15W	116 x 34 x 19	3T492204



350mA - 12W DIMMER (OUT)

CE EMC M M F SELV

V IN	Hz	mA	W	L x P x H (mm)	COD.
220V	50...60Hz	350mA	1-12W	138 x 40 x 29	3T493801
110V			1-10W		

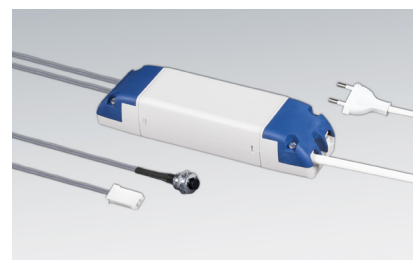

350mA - 15W IP54

CE ENEC 05 EMC M M F SELV IP54

V IN	Hz	mA	W	L x P x H (mm)	COD.
220V	50...60Hz	350mA	1-15W	100 x 40 x 21	3T494703

