

SUN

LED 350mA - 3,5W


IT Faretto da incasso - Realizzato in metallo con schermo in policarbonato.

EN Recessed spotlight - Metal structure and screen in polycarbonate.

DE Einbaustrahler - Metall-Gehäuse und Polykarbonat- Abdeckung.


118-140 lm/W PHOTOLOGICAL CLASS 0 CRI=85

CE ENEC 05 IP20 PATENTED

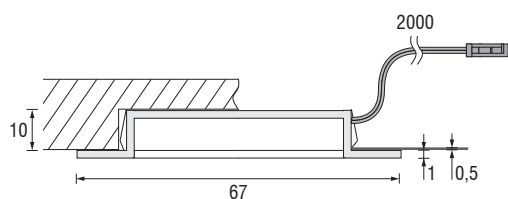


(A) Installazione su legno
Fitting - Wooden Surfaces
Montage - Holz

(B) Installazione su lamiera
Fitting - Metal Surfaces
Montage - Metall

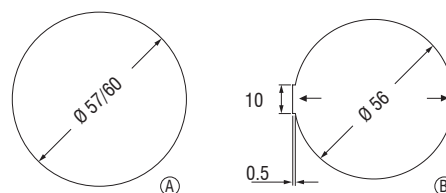

Foro di incasso / Recessed hole / Einbaumaße

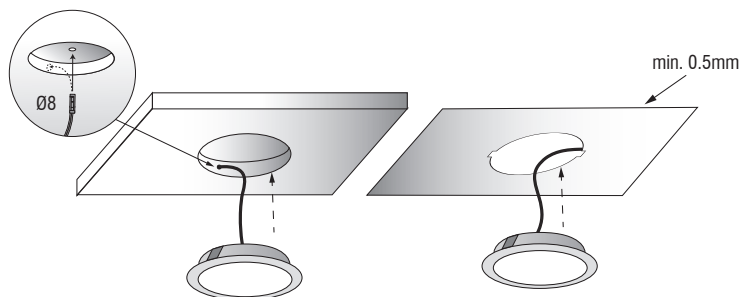

Finitura Finish - Ausführung	3000 K		4000 K		Imballo - Packaging - Verpackung		
	Codice - Part no. - Artikel-Nr.	EEC	Codice - Part no. - Artikel-Nr.	EEC	Pcs	Kg	mm
Acciaio / Steel / Edelstahl	1730020A	A++	1730120A	A++	1	0,075	25 x 75 x 100
Alluminio / Aluminium / Aluminium	1730020S	A++	1730120S	A++	1	0,075	25 x 75 x 100
Cromo / Chrome / Chrom	1730020C	A++	1730120C	A++	1	0,075	25 x 75 x 100
Bronzo / Bronze / Bronze	1730020L	A++	1730120L	A++	1	0,075	25 x 75 x 100
Oro / Gold / Gold	1730020O	A++	1730120O	A++	1	0,075	25 x 75 x 100
Bianco / White / Weiß	1730020B	A++	1730120B	A++	1	0,075	25 x 75 x 100
Nero / Black / Schwarz	1730020N	A++	1730120N	A++	1	0,075	25 x 75 x 100

SUN LED 350mA - 3,5W		LUX
		3000K
		4000K
mm	108°	
250	Ø 1000	1500
		1600
500	Ø 2000	380
		410
750	Ø 3100	180
		170
1000	Ø 4100	100
		100

Dimensioni in millimetri (mm) / Dimensions in Millimeters (mm) / Dimensionen in Millimetern (mm)
Alimentatore non incluso / Driver not included / LED-Konverter nicht inbegriffen

Connettore
Connector / Verbindungsstecker




SUN KIT 3

LED 350mA - 3 x 3,5W

IT KIT Faretto da incasso - 3 faretti SUN, 1 driver con cavo e spina, 1 distributore a 4-uscite.


EN KIT Recessed spotlight - 3 SUN spotlights, 1 driver with cable and plug, 1 4-way distribution box.

DE SET Einbaustrahler - 3 SUN-Strahler, 1 Konverter mit Kabel und Stecker, 1 4-fach Verteiler.

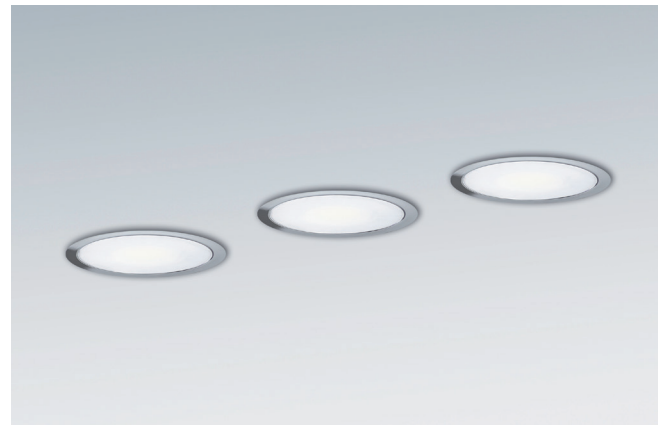



118-140 lm/W PHOTOLOGICAL CLASS 0 CRI=85

CE ENEC 05 IP20 PATENTED

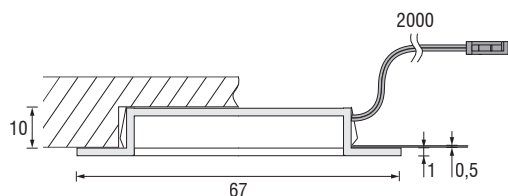


(A) Installazione su legno
Fitting - Wooden Surfaces
Montage - Holz

(B) Installazione su lamiera
Fitting - Metal Surfaces
Montage - Metall



Foro di incasso / Recessed hole / Einbaumaße

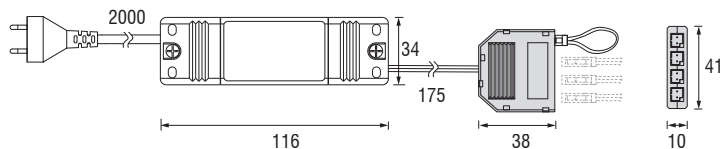

Driver 350mA incluso
350mA Driver included
350mA-LED-Konverter inbegriffen

Finitura Finish - Ausführung	3000 K		4000 K		Imballo - Packaging - Verpackung		
	Codice - Part no. - Artikel-Nr.	EEC	Codice - Part no. - Artikel-Nr.	EEC	Pcs	Kg	mm
Acciaio / Steel / Edelstahl	173K010A	A++	173K110A	A++	1	0,450	105 x 190 x 120
Alluminio / Aluminium / Aluminium	173K010S	A++	173K110S	A++	1	0,450	105 x 190 x 120
Cromo / Chrome / Chrom	173K010C	A++	173K110C	A++	1	0,450	105 x 190 x 120
Bronzo / Bronze / Bronze	173K010L	A++	173K110L	A++	1	0,450	105 x 190 x 120
Oro / Gold / Gold	173K010O	A++	173K110O	A++	1	0,450	105 x 190 x 120
Bianco / White / Weiß	173K010B	A++	173K110B	A++	1	0,450	105 x 190 x 120
Nero / Black / Schwarz	173K010N	A++	173K110N	A++	1	0,450	105 x 190 x 120

SUN LED 350mA - 3,5W		LUX 3000K 4000K
mm	108°	
250	Ø 1000	1500 1600
500	Ø 2000	380 410
750	Ø 3100	180 170
1000	Ø 4100	100 100

Dimensioni in millimetri (mm) / Dimensions in Millimeters (mm) / Dimensionen in Millimetern (mm)
Alimentatore incluso / Driver included / LED-Konverter inbegriffen

Connettore
Connector / Verbindungsstecker








Distanziali SUN

IT Distanziali per la libera installazione - Struttura in policarbonato verniciato; compatibili con i faretti SUN e SUN Q.

EN Spacers for surface mounting - Coated polycarbonate structure; for SUN and SUN Q spotlights.

DE Anbauringe - Beschichteter Ring aus Polykarbonat; fuer Strahler SUN und SUN Q.

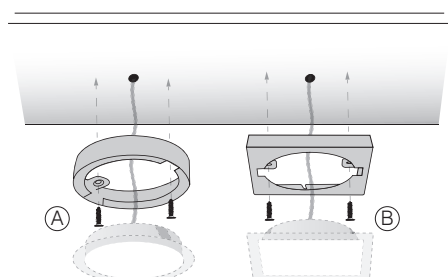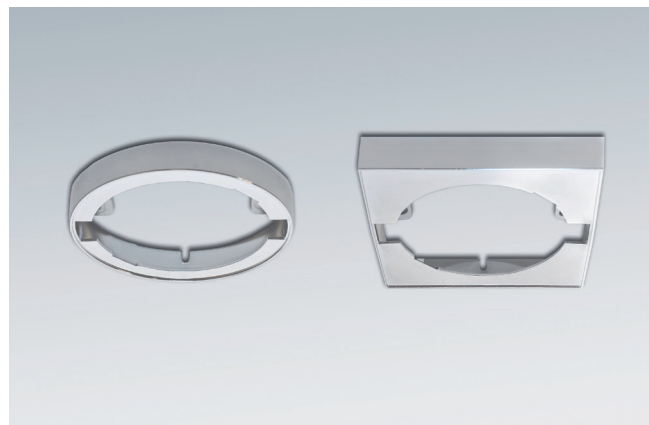

Finitura Finish - Ausführung	Codice - Part no. - Artikel-Nr.		Imballo - Packaging - Verpackung			
	SUN A	SUN Q B	Pcs	Kg A	Kg B	mm
Acciaio / Steel / Edelstahl	6730022A	6732022A	1	0,008	0,011	12 x 75 x 75
Alluminio / Aluminium / Aluminium	6730022S	6732022S	1	0,008	0,011	12 x 75 x 75
Cromo / Chrome / Chrom	6730022C	6732022C	1	0,008	0,011	12 x 75 x 75
Bronzo / Bronze / Bronze	6730022L	6732022L	1	0,008	0,011	12 x 75 x 75
Oro / Gold / Gold	6730022O	6732022O	1	0,008	0,011	12 x 75 x 75
Bianco / White / Weiß	6730022B	6732022B	1	0,008	0,011	12 x 75 x 75
Nero / Black / Schwarz	6730022N	6732022N	1	0,008	0,011	12 x 75 x 75

Dimensioni in millimetri (mm)

Dimensions in Millimeters (mm) / Dimensionen in Millimetern (mm)

Prolunghe e Box di connessione

Extensions and connection boxes / Verlängerungen und Anschlussboxen





LED 350mA

350mA - Cavo per connessione singola / Single connection cable / Einzelverbindungskabel

COD.

6LC10005

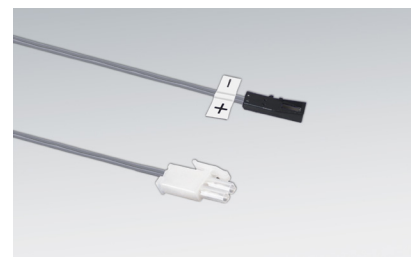

350mA - Prolunga / Extension / Verlängerungskabel



COD.

L = 1000

L = 2000

6LC10001


6LC10002

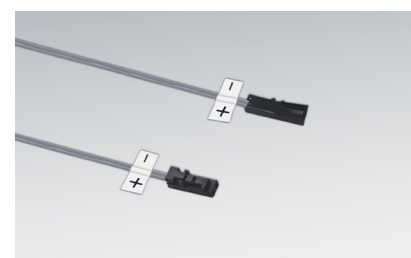

350mA - Distributore a 4 uscite / 4-way distribution box / 4-fach Verteiler

COD.


1T3000

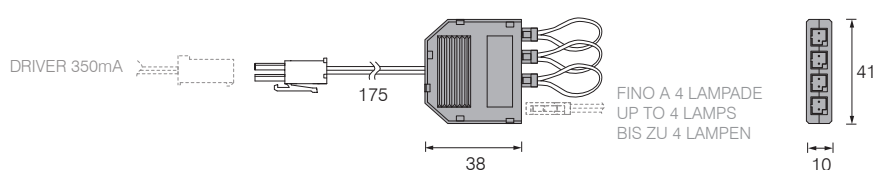

350mA - Catenaria per collegamenti in serie / Series twin socket plug / Serien-Verteiler

COD.

6LC10013

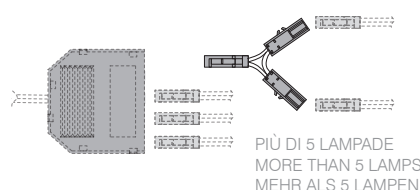

Drivers per LED

LED Drivers / LED-Konverter





LED 350mA

350mA - 15W

CE ENEC 05 cULus EMC M M F SELV


V IN	Hz	mA	W	L x P x H (mm)	A PLUG	B JST
220V	50...60Hz	350mA	1-15W	116 x 34 x 19	151Z10	151Z11
cULus 110V	60Hz	350mA	1-10W	116 x 34 x 19	151Z10110	-

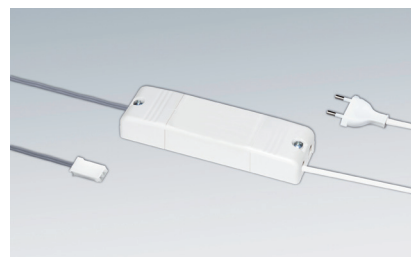

350mA - 15W

CE ENEC 05 EMC M M F SELV



V IN	Hz	mA	W	L x P x H (mm)	COD.
220V	50...60Hz	350mA	1-15W	116 x 34 x 19	3T492204



350mA - 12W DIMMER (OUT)

CE EMC M M F SELV

V IN	Hz	mA	W	L x P x H (mm)	COD.
220V	50...60Hz	350mA	1-12W	138 x 40 x 29	3T493801
110V			1-10W		

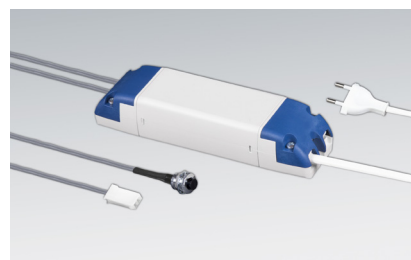

350mA - 15W IP54

CE ENEC 05 EMC M M F SELV IP54

V IN	Hz	mA	W	L x P x H (mm)	COD.
220V	50...60Hz	350mA	1-15W	100 x 40 x 21	3T494703

