

Luminaire


Code 0165030A
Name COME TOGETHER T RAME

Measurem.

Code FTS1802059
Name COME TOGETHER T RAME

Luminaire Flux	359.78 lm	Luminaire Power	3.60 W	Efficacy	99.94 lm/W	Efficiency	100.00%
Lamps Flux	359.78 lm	Maximum value	316.36 cd/klm	Position	C=0.00 G=180.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	70 mm 70 mm	Height Height	270 mm 60 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°		0.003848 m2 0.004200 m2 0.004200 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.004200 m2 0.004200 m2 0.005006 m2	
Coordinate system Date Measurement Distance		CG 18-10-2018 0.00		Symmetry Type Maximum Gamma Angle Measurement Flux		Rotosymmetrical 180 359.78 lm	
LED Flux=439,56lm LED Power=3,6W Eff=82% EfcLed=122lm/W EfcLum=100lm/W CCT=3000K Ra=80 SDCM=3 L70(6K)=50000h							
C.I.E. F UTE	37 71 91 75 100 0.75 G + 0.25 T			D DIN 5040 B NBN		B21 BZ 6 / 1.5 / BZ 5	

Diam=70mm




Semipiani C

180.0 ——— 0.0

ULOR 25.02 %

DLOR 74.98 %

RN 25.02 %

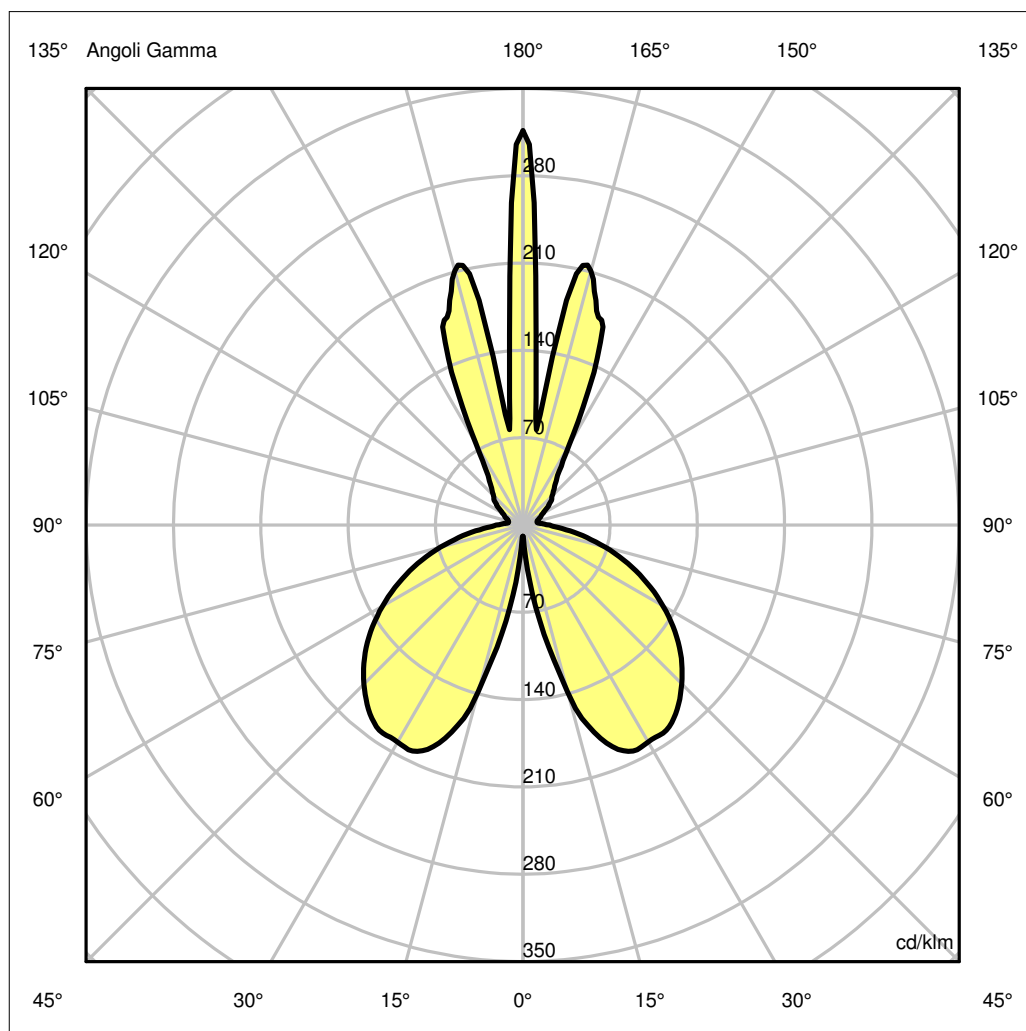

Luminaire

Code 0165030A
Name COME TOGETHER T RAME

Measurerm.


Code FTS1802059
Name COME TOGETHER T RAME

Luminaire Flux	359.78 lm	Luminaire Power	3.60 W	Efficacy	99.94 lm/W	Efficiency	100.00%
Lamps Flux	359.78 lm	Maximum value	316.36 cd/klm	Position	C=0.00 G=180.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	70 mm 70 mm	Height Height	270 mm 60 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°		0.003848 m2 0.004200 m2 0.004200 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.004200 m2 0.004200 m2 0.005006 m2	
Coordinate system Date Measurement Distance		CG 18-10-2018 0.00		Symmetry Type Maximum Gamma Angle Measurement Flux		Rotosymmetrical 180 359.78 lm	
LED Flux=439,56lm LED Power=3,6W Eff=82% EfcLed=122lm/W EfcLum=100lm/W CCT=3000K Ra=80 SDCM=3 L70(6K)=50000h							
C.I.E. F UTE	37 71 91 75 100 0.75 G + 0.25 T			D DIN 5040 B NBN		B21 BZ 6 / 1.5 / BZ 5	

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.07	0.14	0.20	0.27	0.34	OC	0.07	0.14	0.20	0.27	0.34
OB	0.07	0.14	0.20	0.27	0.34	OD	0.07	0.14	0.20	0.27	0.34

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	113.82	44.24	75.93	48.59	17.53	11.91	8.38	5.63	4.26	5.42
OB	113.82	44.24	75.93	48.59	17.53	11.91	8.38	5.63	4.26	5.42
OC	113.82	44.24	75.93	48.59	17.53	11.91	8.38	5.63	4.26	5.42
OD	113.82	44.24	75.93	48.59	17.53	11.91	8.38	5.63	4.26	5.42

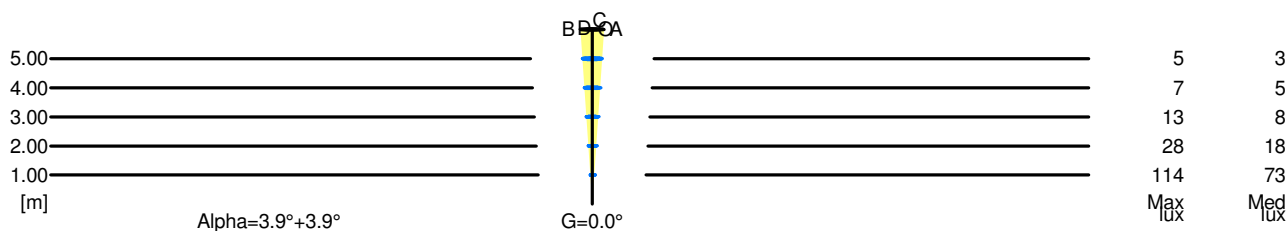

5.00	0.68	5	3	
4.00	0.54	7	5	
3.00	0.41	13	8	
2.00	0.27	28	18	
1.00	0.14	114	73	
H[m]	D[m]	Max lux	Med lux	Alpha=3.9°+3.9° G=0.0