


Luminaire

Code 0146010A
Name DIOSCURI TAVOLO 250

Measurem.

Code FTS0002525
Name DIOSCURI TAVOLO 250

Luminaire Flux	1069.58 lm	Luminaire Power	70.00 W	Efficacy	15.28 lm/W	Efficiency	89.13%
Lamps Flux	1200.00 lm	Maximum value	76.32 cd/klm	Position	C=0.00 G=165.00	CG	Rotosymmetrical
Round Luminaire		Diam.	250 mm	Height	250 mm		
Round Luminous Area		Diam.	250 mm	Height	250 mm		
Horizontal Luminous Area		0.049087 m ²		Emitting area on Plane 180°		0.062500 m ²	
Emitting area on Plane 0°		0.062500 m ²		Emitting area on Plane 270°		0.062500 m ²	
Emitting area on Plane 90°		0.062500 m ²		Glare area at 76°		0.072519 m ²	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		16-05-2000		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1200.00 lm	
EC70CL							
C.I.E.	19 45 72 47 89			D DIN 5040		C12	
F UTE	0.42 J + 0.48 T			B NBN		BZ 9	

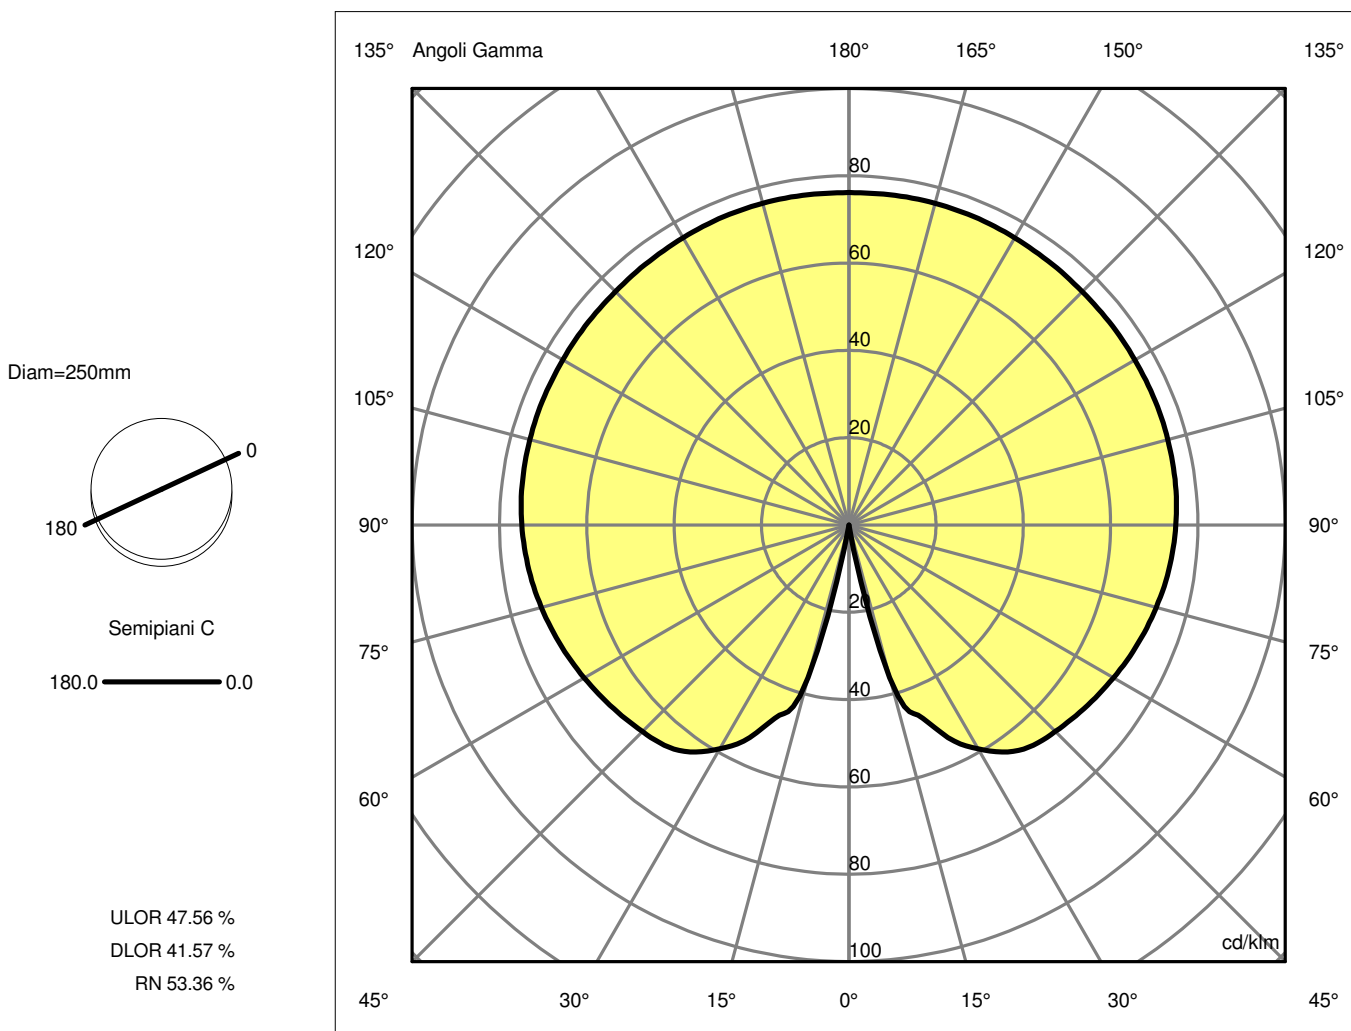

Luminaire

Code 0146010A
Name DIOSCURI TAVOLO 250

Measurem.

Code FTS0002525
Name DIOSCURI TAVOLO 250

Luminaire Flux	1069.58 lm	Luminaire Power	70.00 W	Efficacy	15.28 lm/W	Efficiency	89.13%
Lamps Flux	1200.00 lm	Maximum value	76.32 cd/klm	Position	C=0.00 G=165.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	250 mm 250 mm	Height Height	250 mm 250 mm		
Horizontal Luminous Area		0.049087 m2		Emitting area on Plane 180°		0.062500 m2	
Emitting area on Plane 0°		0.062500 m2		Emitting area on Plane 270°		0.062500 m2	
Emitting area on Plane 90°		0.062500 m2		Glare area at 76°		0.072519 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		16-05-2000		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1200.00 lm	
EC70CL							
C.I.E.	19 45 72 47 89			D DIN 5040	C12		
F UTE	0.42 J + 0.48 T			B NBN	BZ 9		

Apertura a destra non trovata, gamma =12

Apertura a destra non trovata, gamma =12

Luminaire

Code 0146010A
Name DIOSCURI TAVOLO 250

Measurement

Code FTS0002525
Name DIOSCURI TAVOLO 250

Luminaire Flux	1069.58 lm	Luminaire Power	70.00 W	Efficacy	15.28 lm/W	Efficiency	89.13%
Lamps Flux	1200.00 lm	Maximum value	76.32 cd/klm	Position	C=0.00 G=165.00	CG	Rotosymmetrical

UGR
S = 0.250

Reflectancies										
Ceiling/Cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
WorkingPlane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
RoomDimensions	ViewedCrosswise					ViewedEndwise				
x=2H y=2H	8.8	9.8	9.8	10.7	12.0	8.8	9.8	9.8	10.7	12.0
x=2H y=3H	11.5	12.4	12.5	13.4	14.6	11.5	12.4	12.5	13.4	14.6
x=2H y=4H	13.0	13.8	13.9	14.7	16.0	13.0	13.8	13.9	14.7	16.0
x=2H y=6H	14.4	15.1	15.3	16.1	17.4	14.4	15.1	15.3	16.1	17.4
x=2H y=8H	15.1	15.8	16.0	16.8	18.1	15.1	15.8	16.0	16.8	18.1
x=2H y=12H	15.8	16.4	16.7	17.4	18.7	15.8	16.4	16.7	17.4	18.7
x=4H y=2H	9.8	10.6	10.8	11.6	12.9	9.8	10.6	10.8	11.6	12.9
x=4H y=3H	12.6	13.3	13.6	14.3	15.6	12.6	13.3	13.6	14.3	15.6
x=4H y=4H	14.2	14.8	15.2	15.8	17.1	14.2	14.8	15.2	15.8	17.1
x=4H y=6H	15.7	16.3	16.7	17.3	18.7	15.7	16.3	16.7	17.3	18.7
x=4H y=8H	16.5	17.0	17.5	18.1	19.4	16.5	17.0	17.5	18.1	19.4
x=4H y=12H	17.3	17.8	18.3	18.8	20.2	17.3	17.8	18.3	18.8	20.2
x=8H y=4H	14.8	15.3	15.8	16.3	17.7	14.8	15.3	15.8	16.3	17.7
x=8H y=6H	16.6	17.0	17.6	18.1	19.4	16.6	17.0	17.6	18.1	19.4
x=8H y=8H	17.5	17.9	18.5	19.0	20.4	17.5	17.9	18.5	19.0	20.4
x=8H y=12H	18.5	18.8	19.5	19.9	21.3	18.5	18.8	19.5	19.9	21.3
x=12H y=4H	14.9	15.4	15.9	16.4	17.8	14.9	15.4	15.9	16.4	17.8
x=12H y=6H	16.8	17.2	17.8	18.2	19.6	16.8	17.2	17.8	18.2	19.6
x=12H y=8H	17.8	18.2	18.9	19.2	20.6	17.8	18.2	18.9	19.2	20.6