

Luminaire


Code 1034010A
Name DIOSCURI TAVOLO 140

Measurem.

Code FTS0002524
Name DIOSCURI TAVOLO 140

Luminaire Flux	659.58 lm	Luminaire Power	48.00 W	Efficacy	13.74 lm/W	Efficiency	89.13%
Lamps Flux	740.00 lm	Maximum value	76.32 cd/klm	Position	C=0.00 G=165.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area	Diam. 140 mm Diam. 140 mm	Height	140 mm	Height	140 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.015394 m2 0.019600 m2 0.019600 m2	Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°				0.019600 m2 0.019600 m2 0.022742 m2	
Coordinate system Date Measurement Distance	CG 16-05-2000 0.00	Symmetry Type Maximum Gamma Angle Measurement Flux				Rotosymmetrical 180 740.00 lm	
66748 ECO							
C.I.E. F UTE	19 45 72 47 89 0.42 J + 0.48 T	D DIN 5040 B NBN		C12 BZ 9			

Diam=140mm




Semipiani C

180.0 ——— 0.0

ULOR 47.56 %

DLOR 41.57 %

RN 53.36 %

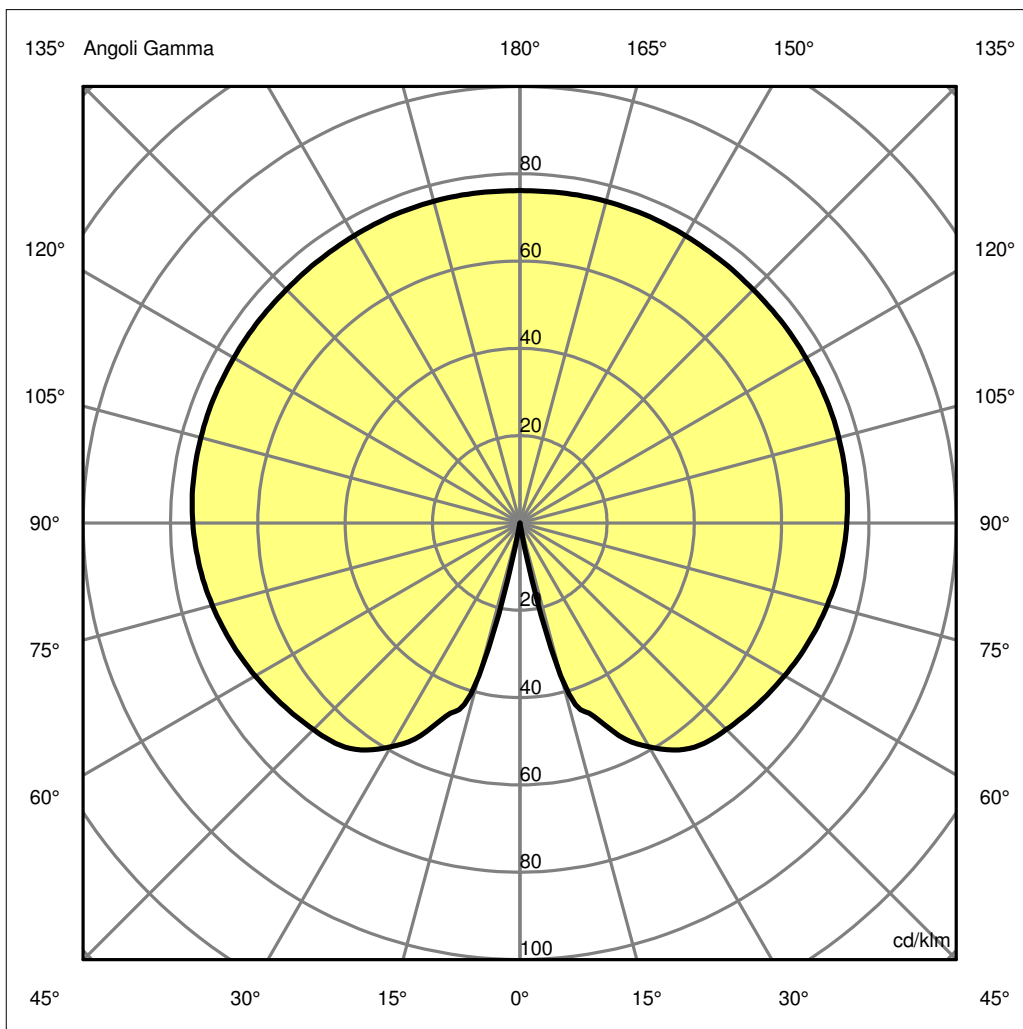

Luminaire

Code 1034010A
Name DIOSCURI TAVOLO 140

Measurem.

Code FTS0002524
Name DIOSCURI TAVOLO 140

Luminaire Flux	659.58 lm	Luminaire Power	48.00 W	Efficacy	13.74 lm/W	Efficiency	89.13%
Lamps Flux	740.00 lm	Maximum value	76.32 cd/klm	Position	C=0.00 G=165.00	CG	Rotosymmetrical
Round Luminaire		Diam.	140 mm	Height	140 mm		
Round Luminous Area		Diam.	140 mm	Height	140 mm		
Horizontal Luminous Area		0.015394 m2		Emitting area on Plane 180°		0.019600 m2	
Emitting area on Plane 0°		0.019600 m2		Emitting area on Plane 270°		0.019600 m2	
Emitting area on Plane 90°		0.019600 m2		Glare area at 76°		0.022742 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		16-05-2000		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		740.00 lm	
66748 ECO							
C.I.E.	19 45 72 47 89			D DIN 5040	C12		
F UTE	0.42 J + 0.48 T			B NBN	BZ 9		

Apertura a destra non trovata, gamma =12

Apertura a destra non trovata, gamma =12

Luminaire

Code 1034010A
Name DIOSCURI TAVOLO 140

Measurement

Code FTS0002524
Name DIOSCURI TAVOLO 140

Luminaire Flux	659.58 lm	Luminaire Power	48.00 W	Efficacy	13.74 lm/W	Efficiency	89.13%
Lamps Flux	740.00 lm	Maximum value	76.32 cd/klm	Position	C=0.00 G=165.00	CG	Rotosymmetrical

UGR
S = 0.250

Reflectancies										
Ceiling/Cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
WorkingPlane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
RoomDimensions	ViewedCrosswise					ViewedEndwise				
x=2H y=2H	11.2	12.1	12.1	13.1	14.3	11.2	12.1	12.1	13.1	14.3
x=2H y=3H	13.9	14.7	14.8	15.7	17.0	13.9	14.7	14.8	15.7	17.0
x=2H y=4H	15.3	16.1	16.3	17.1	18.4	15.3	16.1	16.3	17.1	18.4
x=2H y=6H	16.7	17.5	17.7	18.5	19.7	16.7	17.5	17.7	18.5	19.7
x=2H y=8H	17.4	18.1	18.4	19.1	20.4	17.4	18.1	18.4	19.1	20.4
x=2H y=12H	18.1	18.8	19.1	19.8	21.1	18.1	18.8	19.1	19.8	21.1
x=4H y=2H	12.2	13.0	13.1	13.9	15.2	12.2	13.0	13.1	13.9	15.2
x=4H y=3H	15.0	15.7	16.0	16.7	18.0	15.0	15.7	16.0	16.7	18.0
x=4H y=4H	16.5	17.1	17.5	18.2	19.5	16.5	17.1	17.5	18.2	19.5
x=4H y=6H	18.1	18.6	19.1	19.7	21.0	18.1	18.6	19.1	19.7	21.0
x=4H y=8H	18.9	19.4	19.9	20.4	21.8	18.9	19.4	19.9	20.4	21.8
x=4H y=12H	19.6	20.1	20.7	21.2	22.5	19.6	20.1	20.7	21.2	22.5
x=8H y=4H	17.1	17.7	18.2	18.7	20.1	17.1	17.7	18.2	18.7	20.1
x=8H y=6H	18.9	19.4	20.0	20.4	21.8	18.9	19.4	20.0	20.4	21.8
x=8H y=8H	19.9	20.2	20.9	21.3	22.7	19.9	20.2	20.9	21.3	22.7
x=8H y=12H	20.8	21.1	21.9	22.2	23.6	20.8	21.1	21.9	22.2	23.6
x=12H y=4H	17.3	17.7	18.3	18.8	20.2	17.3	17.7	18.3	18.8	20.2
x=12H y=6H	19.1	19.5	20.2	20.6	22.0	19.1	19.5	20.2	20.6	22.0
x=12H y=8H	20.2	20.5	21.2	21.6	23.0	20.2	20.5	21.2	21.6	23.0