

Luminaire


Code 1703010A
Name METEORITE 15 TAVOLO

Measurem.

Code FTS1400877
Name METEORITE 15 TAVOLO

Luminaire Flux	629.73 lm	Luminaire Power	60.00 W	Efficacy	10.50 lm/W	Efficiency	64.26%
Lamps Flux	980.00 lm	Maximum value	58.95 cd/klm	Position	C=0.00 G=136.00	CG	Rotosymmetrical
Round Luminaire		Diam.	150 mm	Height	160 mm		
Round Luminous Area		Diam.	150 mm	Height	160 mm		
Horizontal Luminous Area		0.017671 m2		Emitting area on Plane 180°		0.024000 m2	
Emitting area on Plane 0°		0.024000 m2		Emitting area on Plane 270°		0.024000 m2	
Emitting area on Plane 90°		0.024000 m2		Glare area at 76°		0.027562 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		23-03-2015		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		980.00 lm	
OSRAM							
C.I.E.	15 41 70 44 64			D DIN 5040		C12	
F UTE	--			B NBN		BZ 10	

Diam=150mm




Semipiani C

180.0 — 0.0

ULOR 36.18 %

DLOR 28.08 %

RN 56.31 %

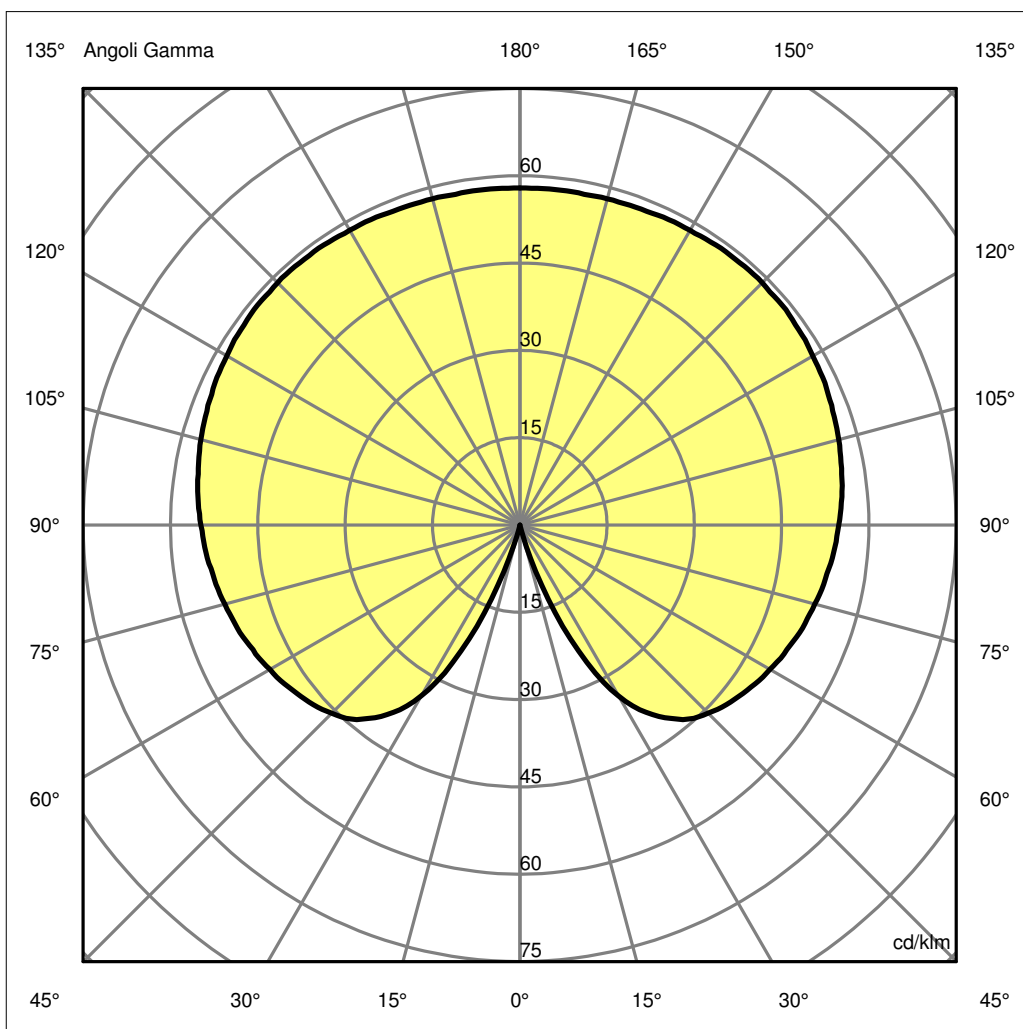

Luminaire

Code 1703010A
Name METEORITE 15 TAVOLO

Measurem.

Code FTS1400877
Name METEORITE 15 TAVOLO

Luminaire Flux	629.73 lm	Luminaire Power	60.00 W	Efficacy	10.50 lm/W	Efficiency	64.26%
Lamps Flux	980.00 lm	Maximum value	58.95 cd/klm	Position	C=0.00 G=136.00	CG	Rotosymmetrical
Round Luminaire		Diam.	150 mm	Height	160 mm		
Round Luminous Area		Diam.	150 mm	Height	160 mm		
Horizontal Luminous Area		0.017671 m2		Emitting area on Plane 180°		0.024000 m2	
Emitting area on Plane 0°		0.024000 m2		Emitting area on Plane 270°		0.024000 m2	
Emitting area on Plane 90°		0.024000 m2		Glare area at 76°		0.027562 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		23-03-2015		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		980.00 lm	
OSRAM							
C.I.E.	15 41 70 44 64			D DIN 5040	C12		
F UTE	--			B NBN	BZ 10		

Apertura a destra non trovata, gamma =44

Apertura a destra non trovata, gamma =44

Luminaire

Code 1703010A
Name METEORITE 15 TAVOLO

Measurement

Code FTS1400877
Name METEORITE 15 TAVOLO

Luminaire Flux	629.73 lm	Luminaire Power	60.00 W	Efficacy	10.50 lm/W	Efficiency	64.26%
Lamps Flux	980.00 lm	Maximum value	58.95 cd/klm	Position	C=0.00 G=136.00	CG	Rotosymmetrical

UGR
S = 0.250

Reflectancies										
Ceiling/Cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
WorkingPlane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
RoomDimensions	ViewedCrosswise					ViewedEndwise				
x=2H y=2H	10.2	11.1	11.1	12.1	13.4	10.2	11.1	11.1	12.1	13.4
x=2H y=3H	12.9	13.8	13.9	14.8	16.1	12.9	13.8	13.9	14.8	16.1
x=2H y=4H	14.4	15.2	15.3	16.2	17.5	14.4	15.2	15.3	16.2	17.5
x=2H y=6H	15.8	16.5	16.8	17.5	18.9	15.8	16.5	16.8	17.5	18.9
x=2H y=8H	16.5	17.2	17.5	18.2	19.6	16.5	17.2	17.5	18.2	19.6
x=2H y=12H	17.2	17.9	18.2	18.9	20.3	17.2	17.9	18.2	18.9	20.3
x=4H y=2H	11.2	12.0	12.1	13.0	14.3	11.2	12.0	12.1	13.0	14.3
x=4H y=3H	14.0	14.7	15.1	15.7	17.1	14.0	14.7	15.1	15.7	17.1
x=4H y=4H	15.6	16.2	16.6	17.2	18.6	15.6	16.2	16.6	17.2	18.6
x=4H y=6H	17.2	17.7	18.2	18.8	20.1	17.2	17.7	18.2	18.8	20.1
x=4H y=8H	17.9	18.5	19.0	19.5	20.9	17.9	18.5	19.0	19.5	20.9
x=4H y=12H	18.7	19.2	19.8	20.3	21.7	18.7	19.2	19.8	20.3	21.7
x=8H y=4H	16.2	16.7	17.2	17.8	19.2	16.2	16.7	17.2	17.8	19.2
x=8H y=6H	18.0	18.4	19.1	19.5	20.9	18.0	18.4	19.1	19.5	20.9
x=8H y=8H	18.9	19.3	20.0	20.4	21.8	18.9	19.3	20.0	20.4	21.8
x=8H y=12H	19.9	20.2	21.0	21.3	22.8	19.9	20.2	21.0	21.3	22.8
x=12H y=4H	16.3	16.8	17.4	17.9	19.3	16.3	16.8	17.4	17.9	19.3
x=12H y=6H	18.2	18.6	19.3	19.7	21.1	18.2	18.6	19.3	19.7	21.1
x=12H y=8H	19.3	19.6	20.3	20.7	22.1	19.3	19.6	20.3	20.7	22.1