

Luminaire

Code 1702010A
Name METEORITE 35 sospensione

Measurerm.

Code FTS1400356
Name METEORITE 35 sospensione

Luminaire Flux	1747.88 lm	Luminaire Power	150.00 W	Efficacy	11.65 lm/W	Efficiency	72.83%
Lamps Flux	2400.00 lm	Maximum value	64.61 cd/klm	Position	C=0.00 G=109.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area	Diam. 360 mm Diam. 360 mm	Height	300 mm	Height	360 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.101788 m2 0.129600 m2 0.129600 m2	Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°				0.129600 m2 0.129600 m2 0.150375 m2	
Coordinate system Date Measurement Distance	CG 22-07-2014 0.00	Symmetry Type Maximum Gamma Angle Measurement Flux				Rotosymmetrical 180 2400.00 lm	
2700K - I _{max} =66 cd/klm							
C.I.E. F UTE	21 46 72 48 73 0.35 J + 0.38 T	D DIN 5040 B NBN		C12 BZ 9			


Diam=360mm



Semipiani C

180.0 ——— 0.0

ULOR 38.14 %
DLOR 34.69 %
RN 52.37 %

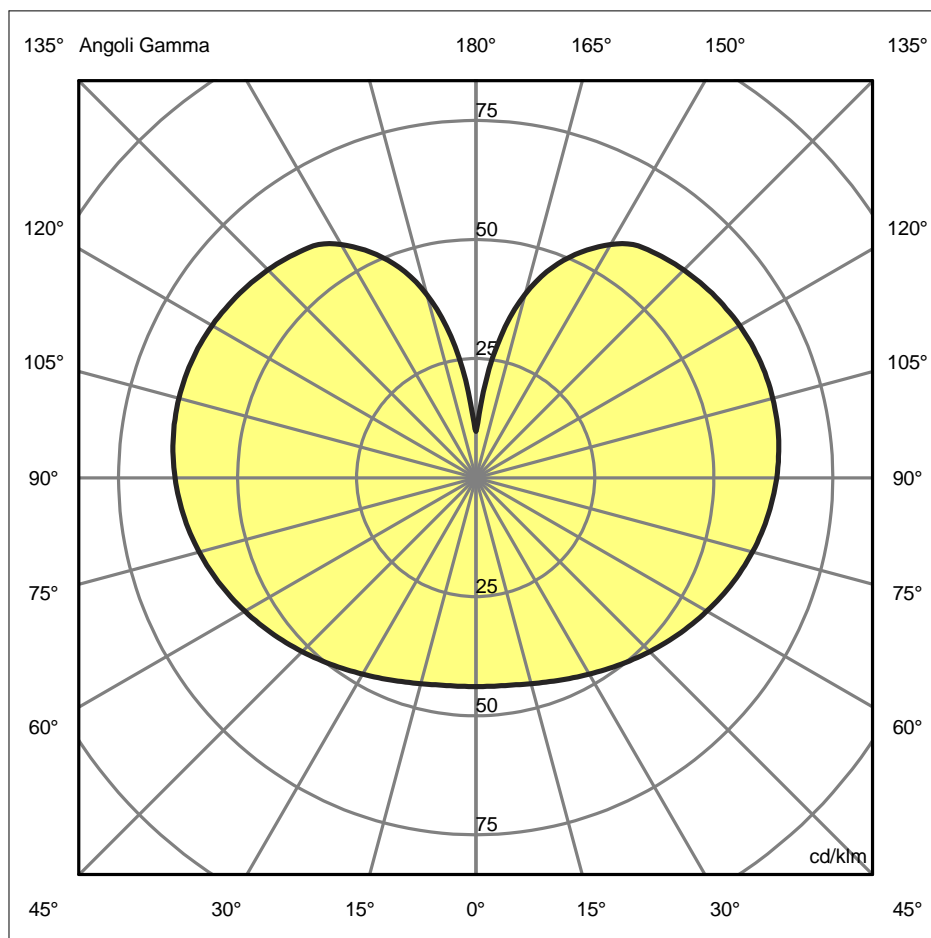

Luminaire

Code 1702010A
Name METEORITE 35 sospensione

Measurem.

Code FTS1400356
Name METEORITE 35 sospensione

Luminaire Flux	1747.88 lm	Luminaire Power	150.00 W	Efficacy	11.65 lm/W	Efficiency	72.83%
Lamps Flux	2400.00 lm	Maximum value	64.61 cd/klm	Position	C=0.00 G=109.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	360 mm 360 mm	Height Height	300 mm 360 mm		
Horizontal Luminous Area		0.101788 m2		Emitting area on Plane 180°		0.129600 m2	
Emitting area on Plane 0°		0.129600 m2		Emitting area on Plane 270°		0.129600 m2	
Emitting area on Plane 90°		0.129600 m2		Glare area at 76°		0.150375 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		22-07-2014		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2400.00 lm	
2700K - I _{max} =66 cd/Klm							
C.I.E.	21 46 72 48 73			D DIN 5040	C12		
F UTE	0.35 J + 0.38 T			B NBN	BZ 9		

Apertura a destra non trovata, gamma =71

Apertura a destra non trovata, gamma =71