

Luminaire

Code 0615030A
Name TALO PARETE LED CROMO LUCIDO

Measurem.

Code FTS1601142
Name TALO PARETE LED CROMO LUCIDO

Luminaire Flux	1343.89 lm	Luminaire Power	20.00 W	Efficacy	67.19 lm/W	Efficiency	100.00%
Lamps Flux	1343.89 lm	Maximum value	207.68 cd/klm	Position	C=0.00 G=180.00	CG	Asymmetrical
Rectangular Luminaire		Length	206 mm	Width	100 mm	Height	43 mm
Rectangular Luminous Area		Length	135 mm	Width	40 mm	Height	0 mm
Horizontal Luminous Area		0.005400 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.001306 m2	
Coordinate system		CG		Symmetry Type		Asymmetrical	
Date		17-11-2015		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1343.89 lm	


LED Flux=1690lm LED Power=17,6W Eff=80% EfcLed=96lm/W EfcLum=67lm/W Ra=90 SDCM=3 L70(6K)=50000h

C.I.E. 47 79 96 44 100
F UTE 0.44 E + 0.56 T

D DIN 5040
B NBN

C32
BZ 5 / 1.25 / BZ 4

206mm x 100mm




Semipiani C

180.0 ——— 0.0
270.0 - - - - 90.0

ULOR 55.77 %

DLOR 44.23 %

RN 55.77 %

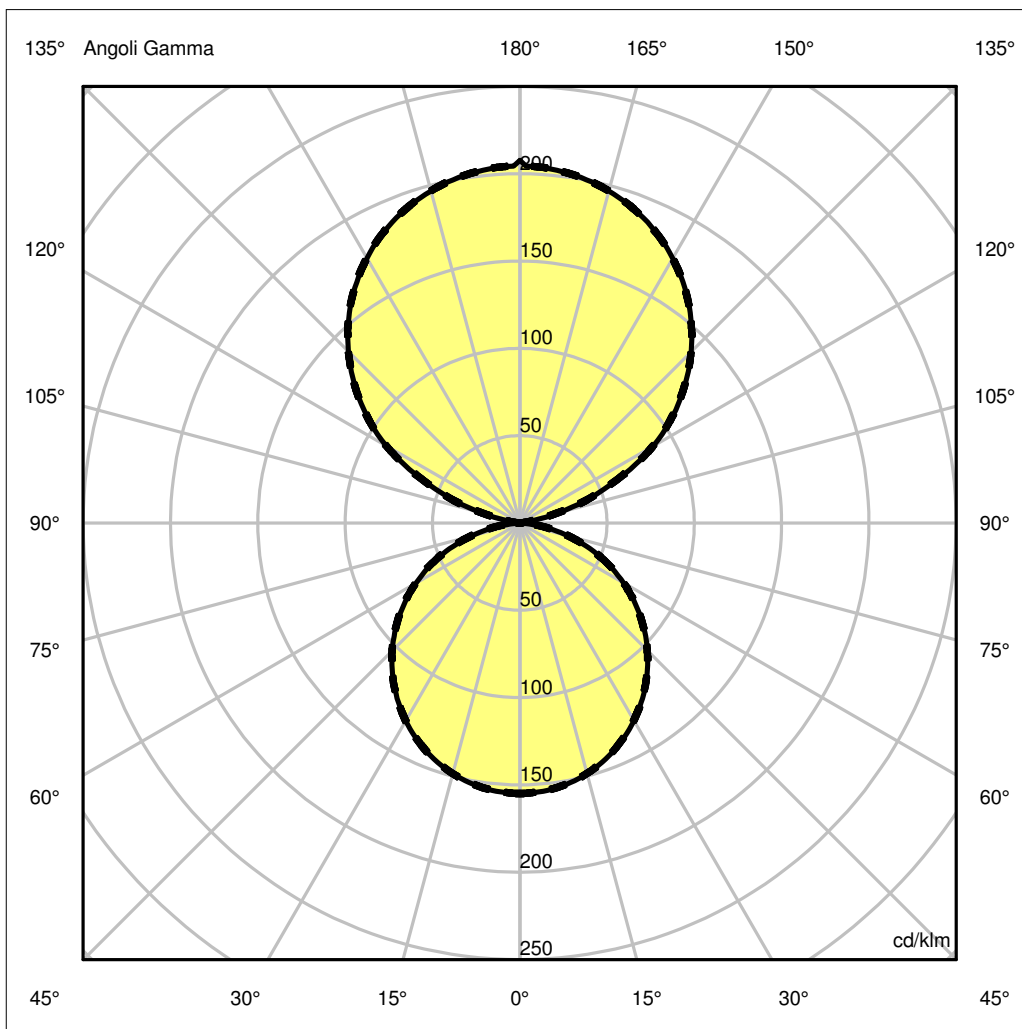

Luminaire

Code 0615030A
Name TALO PARETE LED CROMO LUCIDO

Measurerm.

Code FTS1601142
Name TALO PARETE LED CROMO LUCIDO

Luminaire Flux	1343.89 lm	Luminaire Power	20.00 W	Efficacy	67.19 lm/W	Efficiency	100.00%
Lamps Flux	1343.89 lm	Maximum value	207.68 cd/klm	Position	C=0.00 G=180.00	CG	Asymmetrical
Rectangular Luminaire		Length	206 mm	Width	100 mm	Height	43 mm
Rectangular Luminous Area		Length	135 mm	Width	40 mm	Height	0 mm
Horizontal Luminous Area	0.005400 m2			Emitting area on Plane 180°			0.000000 m2
Emitting area on Plane 0°	0.000000 m2			Emitting area on Plane 270°			0.000000 m2
Emitting area on Plane 90°	0.000000 m2			Glare area at 76°			0.001306 m2
Coordinate system	CG			Symmetry Type			Asymmetrical
Date	17-11-2015			Maximum Gamma Angle			180
Measurement Distance	0.00			Measurement Flux			1343.89 lm


LED Flux=1690lm LED Power=17,6W Eff=80% EfcLed=96lm/W EfcLum=67lm/W Ra=90 SDCM=3 L70(6K)=50000h

C.I.E.	47 79 96 44 100	D DIN 5040	C32
F UTE	0.44 E + 0.56 T	B NBN	BZ 5 / 1.25 / BZ 4

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.48	2.95	4.43	5.90	7.38	OC	1.48	2.95	4.43	5.90	7.38
OB	1.48	2.95	4.43	5.90	7.38	OD	1.48	2.95	4.43	5.90	7.38

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	279.10	273.69	264.70	247.28	221.28	186.51	143.67	88.22	29.92	1.84
OB	279.10	273.69	264.70	247.28	221.28	186.51	143.67	88.22	29.92	1.84
OC	279.10	273.69	264.70	247.28	221.28	186.51	143.67	88.22	29.92	1.84
OD	279.10	273.69	264.70	247.28	221.28	186.51	143.67	88.22	29.92	1.84

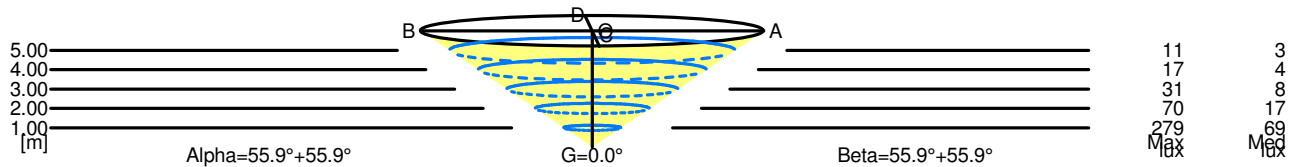

5.00	14.76	11	3		
4.00	11.80	17	4		
3.00	8.85	31	8		
2.00	5.90	70	17		
1.00	2.95	279	69		
H[m]	D[m]	Max lux	Med lux	Alpha=55.9°+55.9°	G=0.0

5.00	14.76	11	3		
4.00	11.80	17	4		
3.00	8.85	31	8		
2.00	5.90	70	17		
1.00	2.95	279	69		
H[m]	D[m]	Max lux	Med lux	Beta=55.9°+55.9°	G=0.0