

## Luminaire

Code 0918070A  
Name Mesmeri LED 3000K - rame

## Measur.

Code FTS1700013  
Name Mesmeri LED 3000K - rame


Luminaire Flux	2622.00 lm	Luminaire Power	28.00 W	Efficacy	93.64 lm/W	Efficiency	100.00%
Lamps Flux	2622.00 lm	Maximum value	377.62 cd/klm	Position	C=0.00 G=140.00	CG	Sym. on planes 0-180
Rectangular Luminaire		Length	340 mm	Width	234 mm	Height	154 mm
Rectangular Luminous Area		Length	145 mm	Width	50 mm	Height	29 mm
Horizontal Luminous Area		0.007250 m <sup>2</sup>		Emitting area on Plane 180°		0.004350 m <sup>2</sup>	
Emitting area on Plane 0°		0.004350 m <sup>2</sup>		Emitting area on Plane 270°		0.001500 m <sup>2</sup>	
Emitting area on Plane 90°		0.001500 m <sup>2</sup>		Glare area at 76°		0.005975 m <sup>2</sup>	
Coordinate system		CG		Symmetry Type		Sym. on planes 0-180	
Date		04-03-2014		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2622.00 lm	

LED Flux=2819,35lm LED Power=25W Eff=93% EfcLed=113lm/W EfcLum=94lm/W Ra=90 SDCM=2 L70(6K)=36000h

C.I.E. 31 55 70 8 100  
F UTE 0.08 H + 0.92 T

D DIN 5040 --  
B NBN BZ 7 / 2 / BZ 8 / 4 / BZ 9

340mm x 234mm




Semipiani C

180.0 ——— 0.0  
270.0 - - - - - 90.0

ULOR 91.98 %

DLOR 8.02 %

RN 91.98 %

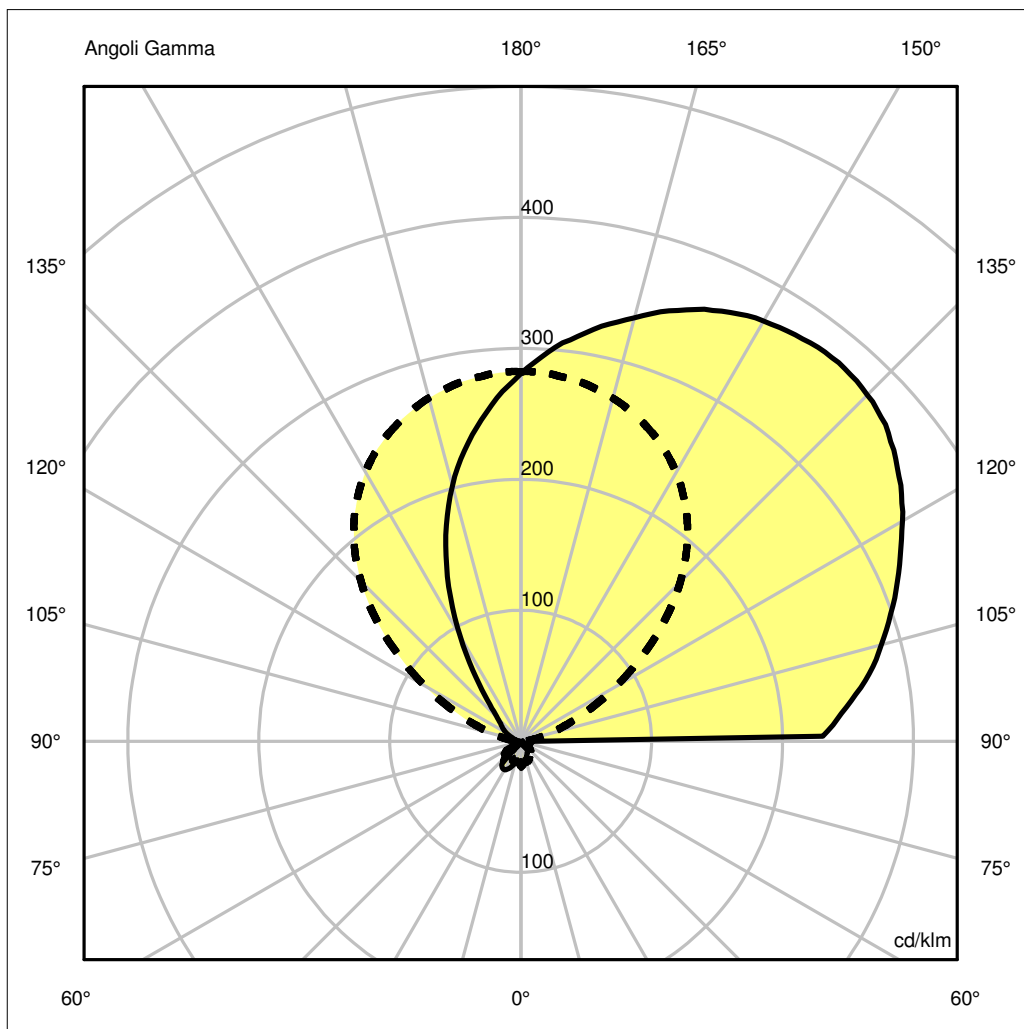

**Luminaire**

Code 0918070A  
Name Mesmeri LED 3000K - rame

**Measur.**

Code FTS1700013  
Name Mesmeri LED 3000K - rame

Luminaire Flux	2622.00 lm	Luminaire Power	28.00 W	Efficacy	93.64 lm/W	Efficiency	100.00%
Lamps Flux	2622.00 lm	Maximum value	377.62 cd/klm	Position	C=0.00 G=140.00	CG	Sym. on planes 0-180
Rectangular Luminaire		Length	340 mm	Width	234 mm	Height	154 mm
Rectangular Luminous Area		Length	145 mm	Width	50 mm	Height	29 mm
Horizontal Luminous Area		0.007250 m2		Emitting area on Plane 180°		0.004350 m2	
Emitting area on Plane 0°		0.004350 m2		Emitting area on Plane 270°		0.001500 m2	
Emitting area on Plane 90°		0.001500 m2		Glare area at 76°		0.005975 m2	
Coordinate system		CG		Symmetry Type		Sym. on planes 0-180	
Date		04-03-2014		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2622.00 lm	
LED Flux=2819,35lm LED Power=25W Eff=93% EfcLed=113lm/W EfcLum=94lm/W Ra=90 SDCM=2 L70(6K)=36000h							
C.I.E.	31 55 70 8 100			D DIN 5040	--		
F UTE	0.08 H + 0.92 T			B NBN	BZ 7 / 2 / BZ 8 / 4 / BZ 9		

Apertura troppo larga

Apertura troppo larga

Apertura troppo larga